



Sales ID #:

B-P30-18-3-UC B-P30-18-4-UC B-P30-18-5-UC B-P30-18-6-UC

Ultrafryer Systems, Inc.
*B-P30-18 High Efficiency/
 High Production Gas Fryer
 with UltraClear Filtration*

Project _____
 Item _____
 Quantity _____
 Approval _____
 Date _____



Standard Features:

- High efficiency Par-3 heat exchanger
- Ultraclear filtration system
- Easy access filter pump pack
- Dial thermostat behind door
- Automatic melt cycle
- Stainless steel vats, cabinet and frame
- Pilotless electronic ignition
- Heavy duty 4-inch casters with front locking brakes
- 2 baskets per vat
- Fast Flow filter envelope

Options and Accessories:

- 2 product Ultrastat® cooking computer
- 10 product Ultrastat® cooking computer
- Marine edge drain board
- Vat covers
- Splash guards
- Basket lifts
- Triple baskets
- Dump station
- Fast Flow filter pads
- Triple filtration
- Stainless steel filter screen
- Drain valve for filter tub
- Boil out hose
- Shortening disposal line
- 48" gas quick disconnect

Specifications

Designed to meet high production frying needs with low energy cost

The Ultrafryer Systems B-P30-18 is a battery of three to six fryers designed to meet high volume frying needs while providing the maximum in fuel savings. The B-P30-18 has a cooking energy efficiency of 61.1 percent. The Ultrafryer® B-P30-18 fast recovery shortens cooking time, allows for large loads during batch cooking, and reduces shortening absorption. Dial thermostat controls, pilot-less electronic ignition, and melt cycle are standard features on every fryer, ensuring accurate temperature control and limiting temperature excursions, producing a perfectly cooked product while maintaining shortening quality. The Phased Array Heat Exchanger provides a large surface area and extended path of travel for the combustible gases, ensuring fast recovery, uniform heat distribution, and low exhaust temperatures of 550°F or less.

The B-P30-18 vats, cabinet and carriage frame are fabricated from high quality stainless steel to ensure a long service life.

The B-P30-18 is equipped with the UltraClear filter system to increase shortening life while retaining quality. The filter system, which fits under the fryer, features an oversized drain and drain trough to allow quick drainage and eliminate clogging. The large drain handles make draining the vats simple and convenient. The Fast Flow filter envelope removes sediment and impurities created in the frying process.

The B-P30-18 has a shortening capacity of 75 - 110 lbs. (36 - 56 liters). The cooking zone is 18" x 18" (457 mm x 457 mm). The B-P30-18 is rated at 110,000 BTU/hr.


ASTM Performance Results

	Heavy Load
Load Size (lb)	5
French Fry Cook Time (min)	2.30
Average Recovery Time (sec)	<10
Production Rate (lb/hr)	120 ± 0.4
Energy Consumption (BTU/lb)	559
Idle Energy Rate (BTU/hr)	5,993
Cooking Energy Rate (BTU/hr)	108,574
Cooking Energy Efficiency (%)	61.1

Based on a minimum of three test replicates.



B-P30-18
75 lb. Gas Fryer with UltraClear Filtration

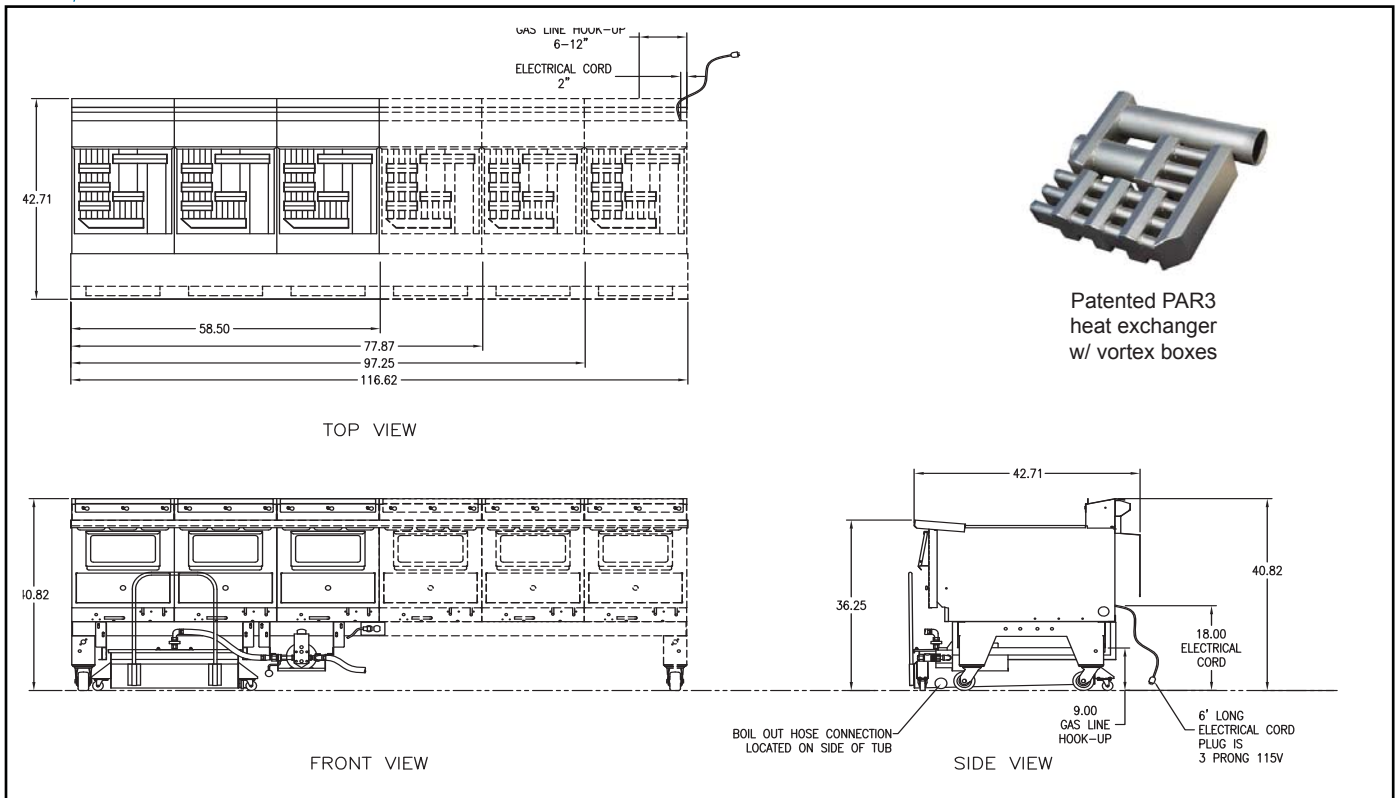

Dimensions - inches (mm)

Sales ID #:	Shortening Capacity	Overall Size			Net Weight	Shipping Info
		Height	Depth	Width		
B-P30-18-3-UC	75 lbs. per vat (36 liters)	40.82" (1037 mm)	42.71" (1085 mm)	58.50" (1486 mm)	780 lbs. (353.8 kgs)	F.O.B. Factory San Antonio, Texas
B-P30-18-4-UC	75 lbs. per vat (36 liters)	40.82" (1037 mm)	42.71" (1085 mm)	77.87" (1978 mm)	975 lbs. (442.3 kgs)	F.O.B. Factory San Antonio, Texas
B-P30-18-5-UC	75 lbs. per vat (36 liters)	40.82" (1037 mm)	42.71" (1085 mm)	97.25" (2470 mm)	1035 lbs. (469.5 kgs)	F.O.B. Factory San Antonio, Texas
B-P30-18-6-UC	75 lbs. per vat (36 liters)	40.82" (1037 mm)	42.71" (1085 mm)	116.62" (2962 mm)	1,229 lbs. (557.5 kgs)	F.O.B. Factory San Antonio, Texas

* UltraClear Filtration not available in 2 vat battery.

Power Requirements:

ELECTRICAL REQUIREMENTS FOR OPERATING SYSTEM
 120 V, 60 HZ, 1 phase, 8.5 amps.
 Electrical cord is 8' long and located on RH side in rear.

GAS REQUIRED AT FRYER MANIFOLD

7" water column natural gas
 14" water column propane/butane

1 1/4" Gas Line connection required for 3-6 vats

Notes:

PERFORMANCE SPECIFICATIONS
 Determined in accordance with ASTM F2144 Standard Test Method for the performance of large open vat fryers:

Nominal Vat Size	Energy Input Rate	Shortening Capacity
18" (457mm x 457mm)	110,000 BTU/hr (116 megajoules)	70 - 100 lbs. (36 - 56 liters)

COOKING ENERGY EFFICIENCY (%): 61.1

Due to continuing engineering development and improvements, specifications are subject to change without notice.
 © January 11, 2011 Ultrafryer Systems, Inc.